




**INSTALLATION  
INSTRUCTIONS**

**Part # 11226110**

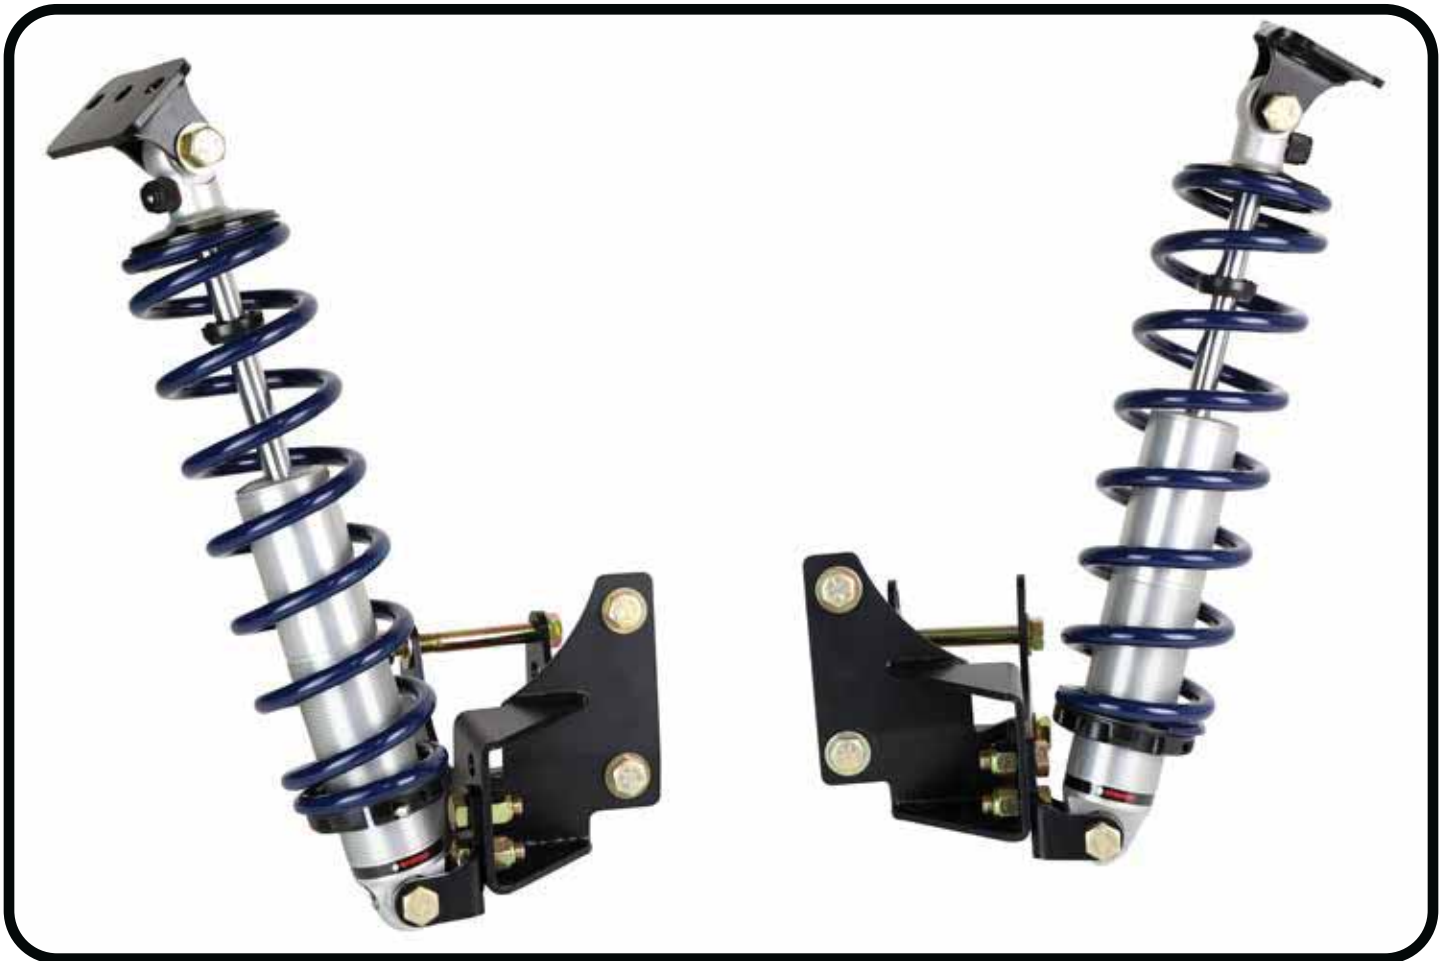

**HQ Series Rear Coilover**

**64-72 A-Body**



[www.ridetech.com](http://www.ridetech.com)  
812.482.2932





**Please Read And Understand All Instructions  
And Warnings Prior To The Installation Of  
This Product.**



**THANK YOU**

Congratulations on your new ridetech product! It's an honor that you've selected the ridetech brand to upgrade your ride. Our products are developed around quality and performance without compromise. We're confident you'll have many years (and miles) of pure driving enjoyment.  
Thank you for choosing ridetech!

### **Road Map**

<b>Exploded Views &amp; Parts Listing</b>	<b>3-4</b>
<b>Coilover Assembly</b>	<b>5-6</b>
<b>Axle Bracket Installation</b>	<b>7-9</b>
<b>Upper/Lower Shock Mounts</b>	<b>10</b>
<b>Coilover Installation</b>	<b>11</b>
<b>Shock Tuning</b>	<b>12-13</b>



# EXPLODED VIEWS AND PARTS LISTING

Item	Part #	Description	QTY
1	982-10-805	5.2 STROKE HQ SERIES SHOCK	2
2	815-05-022-KIT	1.7" SHOCK EYELET	2
3	90001994	5/8" ID BEARING (INSTALLED IN SHOCK)	4
4	90001995	BEARING SNAP RING (INSTALLED IN SHOCK)	8
5	59120225	12" 225LB COIL SPRING	2
6	803-00-199	COIL SPRING RETAINER KIT	2
7	90002043	SHOCK SPACER	8
8	90000516	SLEEVE	2
9	90001370	UNIVERSAL DROPPED SHOCK BRACKET	2
10	90002327	UPPER MOUNT	2
11	90002110	AXLE MOUNT DRIVER	1
12	90002111	AXLE MOUNT PASSENGER (NOT SHOWN)	1

99010272			
Item	Part #	Description	Qty
<b>SHOCK TO MOUNTS</b>			
13	99501050	1/2-13 X 2.50 Hex Head Cap Screw	4
14	99502009	1/2-13 Nylok Nut	4
<b>UPPER MOUNT TO FRAME</b>			
15	99311011	5/16-18 X 1.25 Hex Head Cap Screw	4
16	99312002	5/16-18 Nylok Nut	4
17	99313001	5/16" Flat Washer	8
<b>LOWER MOUNTS TO AXLE</b>			
18	99501053	1/2-13 X 1.50 Hex Head Cap Screw Gr8 ZY	4
14	99502009	1/2-13 Nylok Nut	4
19	99503014	1/2" Flat Washer	8
<b>SHOCK BRACKET TO AXLE MOUNT</b>			
20	99501062	1/2-13 X 1.25" Hex Head Cap Screw	4
14	99502009	1/2-13 Nylok Nut	4
<b>LOWER BAR</b>			
21	99501063	1/2-13 X 4.25 Hex Head Cap Screw	4
14	99502009	1/2-13 Nylok Nut	4
19	99503014	1/2" Flat Washer	8



# COILOVER ASSEMBLY INSTRUCTIONS



**1.** Thread the preload adjustment nut onto the shock from the bottom (Figure 1). A few threads of engagement is ok for now.



Figure 1

**2.** The rebound adjustment knob must be removed prior to installing the upper spring mount in step 4. Turn the adjustment knob clockwise until it stops, then remove the torx screw and the knob (Figure 2).



Figure 2

**3.** Slide a Delrin washer over the shock and onto the adjustment nut, followed by the coil spring (Figure 3).



Figure 3

**4.** With the adjustment knob removed, slide a Delrin washer over the eyelet and place on top of the coil spring, followed by the upper spring mount (Figure 4).



Figure 4



# COILOVER ASSEMBLY INSTRUCTIONS



**5.** Slide the retainer clip over the upper eyelet and into the groove at the base of the eyelet. Make sure it snaps into place and is fully seated in the groove (Figure 5).



Figure 5

**6.** Reinstall the adjustment knob (Figure 6).

Once you have reinstalled the knob, you may want to turn the knob about 12 clicks counterclockwise since the rebound is currently set at "full stiff".



Figure 6

**7.** Thread the adjustment nut up the shock body to remove the slack and secure the spring and upper mount against the eyelet. Install the locking screw in the adjustment nut, but do not tighten yet (Figure 7). This screw will be tightened after your preload has been set.




Figure 7

**8.** Your assembled coilover is ready to be installed on the vehicle.



Figure 8

# Axle Bracket Installation

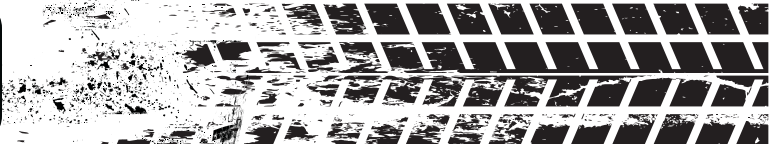

1. Raise the vehicle to a safe and comfortable working height.
2. Remove the existing rear shocks and springs. Refer to the factory service manual for proper disassembly and removal instructions.
3. Remove the lower trailing arm bolt on one side of the car and allow the trailing arm to drop out of the OEM bracket. Only do one side at a time to prevent the axle from rotating.

4. Position the new axle bracket onto the OEM bracket and align the 2nd hole from the top on the new bracket with the mounting hole in the OEM bracket (Figure 1).

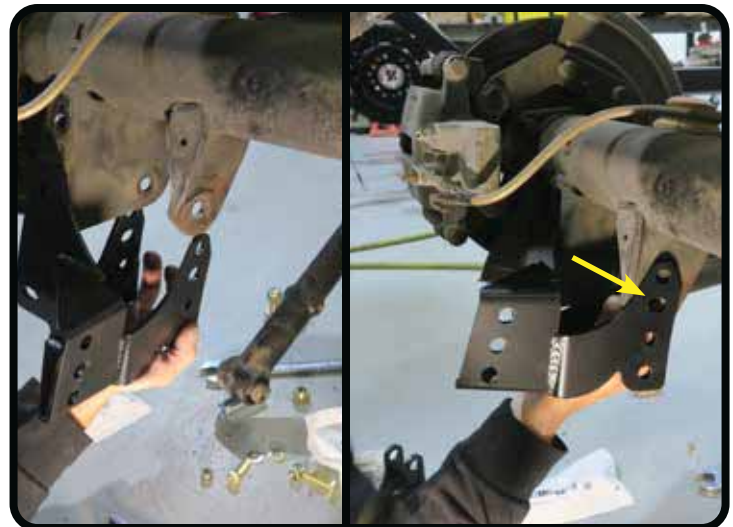


Figure 1


5. If you will be reinstalling the lower trailing arm in the original factory location, align it with the 2nd hole from the top in the axle bracket, and install a 1/2" x 4.25" bolt and washer through the bracket and trailing arm (Figure 2). Install a 1/2" washer and nylok nut on the threaded end of the bolt and snug but do not tighten at this time.

For other mounting location options, see the notes and illustrations on the next page.



Figure 2

# Trailing Arm Mounting Options

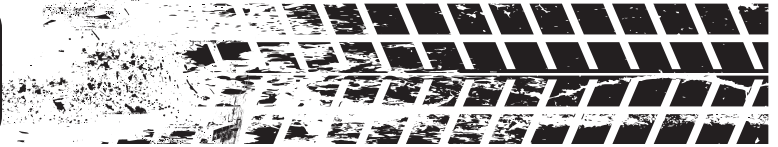

The axle bracket has four mounting location options for the lower trailing arm. See the notes and illustrations below for each mounting option and the associated anti-squat values.

**NOTE:** Anti-squat values may vary slightly with changes in ride height.

**Original Factory Location:** No sleeve or drilling is required.

**Option 1:** No sleeve required. 1/2" hole must be drilled.

**Options 2 & 3:** If you mount the arm in either of the bottom two holes, the sleeve must be added in one of the top two holes to maintain structural integrity. See Option 2 or 3 below for the respective mounting locations. There must be one open hole between the arm and the sleeve in order to avoid interference between the two. For Option 2, a 1/2" hole must be drilled for the sleeve.



**\*No Sleeve Required**

Trailing Arm

Anti-Squat: 90%

Factory Location



**\*No Sleeve Required**

Trailing Arm

Anti-Squat: 60%

Option 1



Sleeve

Trailing Arm

Anti-Squat: 130%

Option 2



Sleeve

Trailing Arm

Anti-Squat: 160%

Option 3

## Axle Bracket Installation

**6.** The lower bolt hole in the back of the axle bracket will align with the factory shock stud hole. Install a 1/2" x 1.5" bolt and washer, followed by a 1/2" washer and nylok nut on the threaded end of the bolt. Snug the hardware but do not tighten at this time.

**7.** The upper hole must be drilled with a 1/2" bit. We recommend using a center punch and 1/8" bit to drill a pilot hole first. You may have to remove the caliper to gain access to the hole location.

The edge of the bracket should be parallel to the edge of the factory axle bracket (highlighted in Figure 4).

**8.** Install a 1/2" x 1.5" bolt and washer in the top hole, followed by a 1/2" washer and nylok nut on the threaded end of the bolt.

You may now torque all axle bracket and trailing arm hardware to **75 ftlbs**.

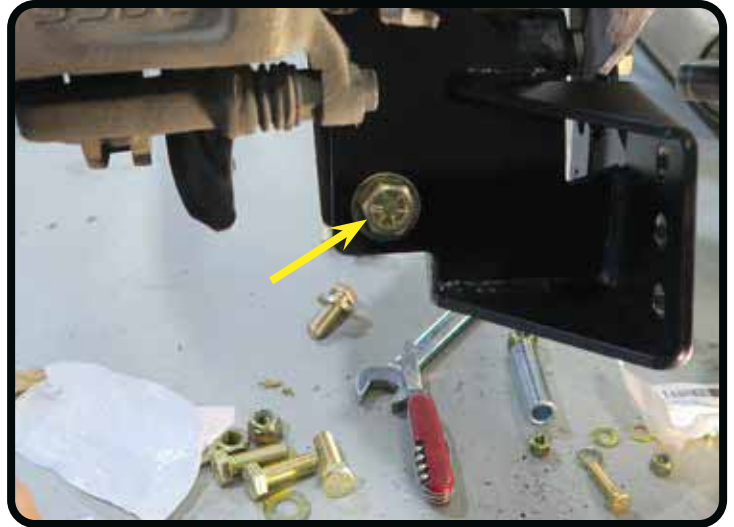


Figure 3



Figure 4



Figure 5

## Upper/Lower Shock Mount Installation

**9.** Position the lower shock mount on the inboard plate of the axle bracket, and align the two holes in the shock mount with the lower two mounting holes on the axle bracket (Figure 6).

**NOTE:** You may also choose to use the top two mounting holes. This will raise the ride height approximately 1".

**10.** Install a 1/2" x 1.25" bolt in each hole, and secure each with a 1/2" nylok nut. Torque to **75 ft-lbs.**

**11.** Position the new upper shock mount bracket in the factory shock location. Install a 5/16" x 1.25" bolt with a 5/16" flat washer on each side, and secure with the 5/16" nylok nuts (Figure 8). Torque to **17 ft-lbs.**

**NOTE:** The bracket position should be offset to the centerline of the car.

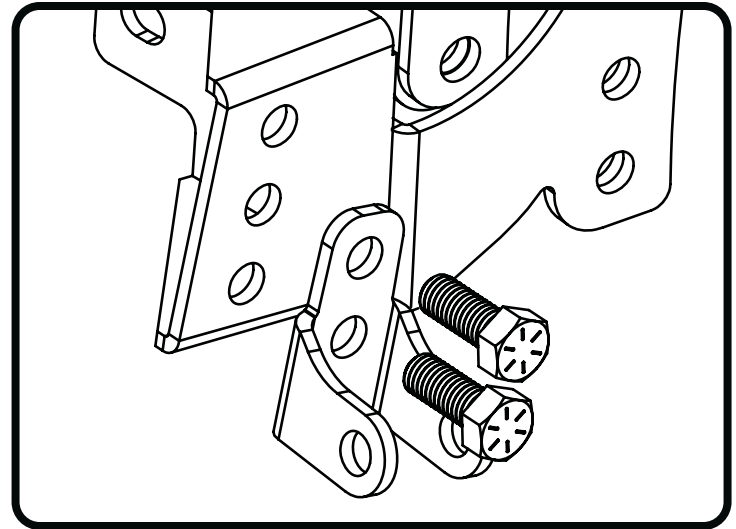


Figure 6



Figure 7

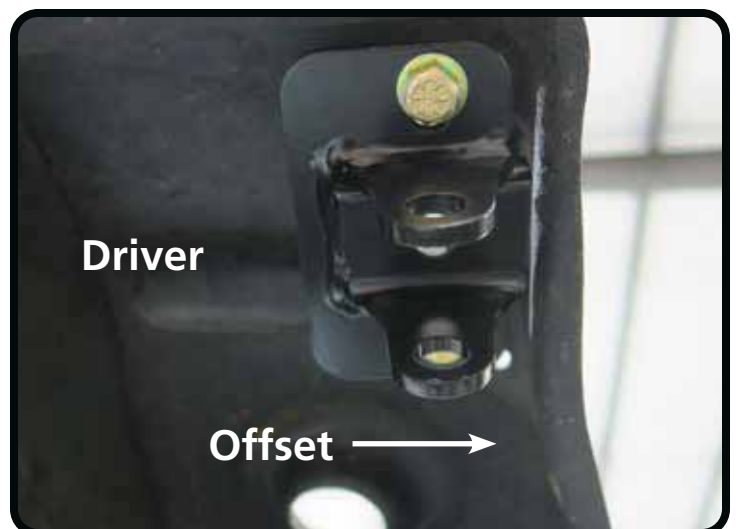


Figure 8

## Coilover Installation

**12.** Install a 90002043 shock spacer into each side of the coilover eyelet bearing. The small end of the spacer will snap into the bearing (Figure 9).

**13.** Position the coilover eyelet into the upper shock mount. Insert a 1/2" x 2.5" bolt through the mount/eyelet and secure with a 1/2" nylok nut (Figure 10).

Torque to **75 ft-lbs.**

**14.** Install a 90002043 shock spacer into each side of the lower coilover bearing.

**15.** Position the coilover into the lower shock mount. Insert a 1/2" x 2.5" bolt through the mount/eyelet and secure with a 1/2" nylok nut (Figure 11).

Torque to **75 ft-lbs.**

**16.** Repeat on the opposite side.



Figure 9



Figure 10



Figure 11




# TUNING GUIDE

## SINGLE-ADJUSTABLE SHOCKS




### The Basics...

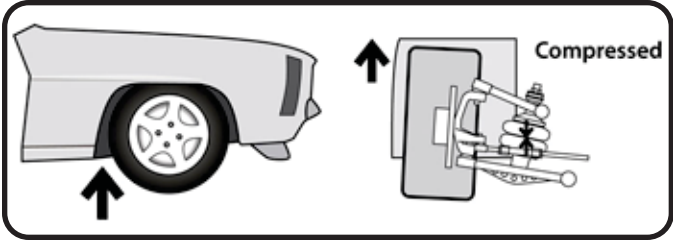

#### COMPRESSION

This typically occurs when you hit a bump in the road. The bump forces the wheel/tire/suspension assembly to "compress" or move upwards into the car.

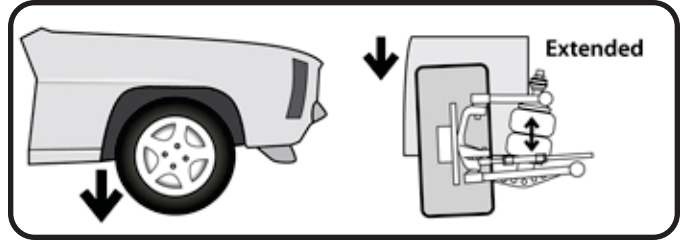


#### REBOUND

Rebound is the opposite of compression. This occurs when the wheel/tire/suspension assembly falls into a pothole, or simply "rebounds" from being compressed.

### Where Are The Knobs?

#### HQ Series Shocks

- The adjustment knob is located on the top of the shock, either protruding from the side of the eyelet, or atop the stud.
- This knob provides rebound adjustment only.

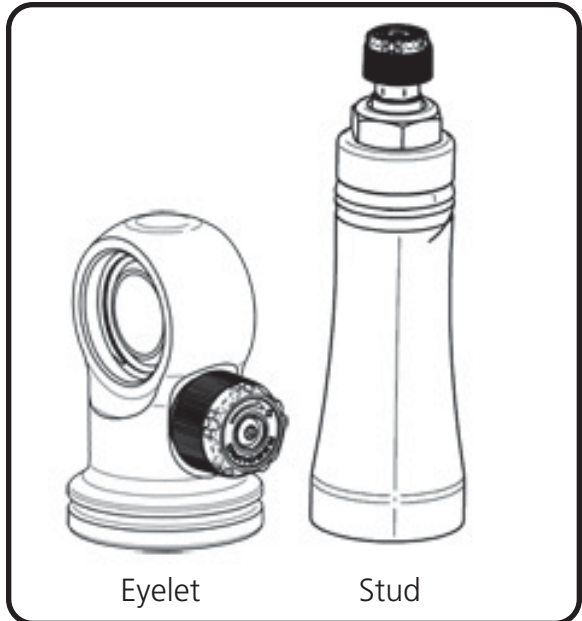

### Knob Function

Counterclockwise

=  
Softer



Clockwise

=  
Firmer





# TUNING GUIDE

## SINGLE-ADJUSTABLE SHOCKS



### Initial Rebound Setting

**NOTE:** Before jumping straight to a middle-of-the-road shock setting, we recommend you experience the full range of adjustment potential of your new shocks by first driving your vehicle at both the “full stiff” and “full soft” settings. Understanding how your shocks behave at these extremes will provide recognizable reference points as you attempt to dial in your settings.

1. Begin by setting your shocks to the “full stiff”, or minimal rebound position. You do this by turning the adjustment knob clockwise until it stops.

2. Now turn the adjustment knob counterclockwise 12 clicks. This is the approximate center of the adjustment range.

3. Take the vehicle for a test drive. Try to determine if you are experiencing any of the unwanted behaviors found at the extremes of the adjustment range. If you are satisfied with the ride quality and handling, you’re all set. Enjoy the ride!

4. If the vehicle feels too “floaty” or soft, turn the knob a few clicks clockwise to increase the damping effect.

If the ride quality is still too harsh or stiff, turn the knob a few more clicks counterclockwise to decrease the damping effect.

5. Take the vehicle for another test drive. If necessary, repeat the steps above until your desired optimal ride quality has been achieved.



### General Guidelines

- The rear shocks typically have the most influence on ride quality. This is due to your seating position being closer to the rear than the front.
- Adjustments to the front shocks will generally require 3-4 clicks in any direction to be noticeable, while adjustments to the rear shocks may only require 1-2 clicks to be felt.
- Don't be afraid to turn the knobs and experience the full adjustment range. You are not going to hurt anything and you can always go back if you adjust too far one way or the other.